



NETLAB+



Cisco Packet Tracer - v8

Installation and Configuration Guide

Document Version: **2022-02-22**

Copyright © 2022 Network Development Group, Inc.
www.netdevgroup.com

NETLAB+ is a registered trademark of Network Development Group, Inc.

Microsoft® and Windows® are registered trademarks of Microsoft Corporation in the United States and other countries.

VMware is a registered trademark of VMware, Inc.

Cisco, IOS, Cisco IOS, Networking Academy, CCNA, and CCNP are registered trademarks of Cisco Systems, Inc.

Contents


1	Introduction	3
1.1	Introducing the Cisco Packet Tracer - v8 Pod	3
2	Planning.....	4
2.1	Pod Creation Workflow	4
2.2	Pod Resource Requirements	5
2.3	ESXi Host Server Requirements.....	5
2.4	NETLAB+ Requirements	5
2.5	NETLAB+ Virtual Machine Infrastructure Setup.....	5
2.6	Software Requirements	6
2.7	Networking Requirements	6
2.7.1	Pod Internet Access	6
2.7.2	Completing the NETLAB+ Pod Internet Access and Use Agreement.....	7
3	Software and Licenses	8
3.1	Downloading OVF Files.....	8
4	Master Pod Configuration.....	9
4.1	Deploying Virtual Machine OVF/OVA Files	9
4.1.1	Modify Virtual Machines.....	10
4.2	NETLAB+ Virtual Machine Inventory Setup.....	13
4.3	Building the Master Pod.....	14
4.3.1	Enabling Lab Content in Course Manager	14
4.3.2	Create the Master Pod.....	14
4.3.3	Attach Virtual Machines to the Master Pod	16
4.3.4	Create Snapshots for the Master Virtual Machines	17
4.3.5	Set the Revert to Snapshot	19
4.3.6	Bring the Master Pod Online	20
4.4	Testing the Master Pod	20
4.4.1	Virtual Machine Credentials	20
4.4.2	Create Class and Schedule the Master Pod	20
4.4.3	Test the Master Pod.....	21
4.4.4	End Reservation	21
5	Pod Cloning	22
5.1	Linked Clones and Full Clones	22
5.2	Creating User Pods.....	22
5.3	Copying Your Master Pod to the Second Host.....	24
5.4	Creating User Pods on the Second Host	25
5.5	Assigning Pods to Students, Teams, or Classes.....	25

1 Introduction

This document provides detailed guidance on performing the installation and configuration of the *Cisco Packet Tracer - v8* pod on the *NETLAB+ VE* system.

1.1 Introducing the Cisco Packet Tracer - v8 Pod

The *Cisco Packet Tracer - v8* pod is a 100% virtual machine pod consisting of two virtual machines. Linked together through virtual networking, these two virtual machines provide the environment for a student or a team to perform the *Cisco Packet Tracer* labs.

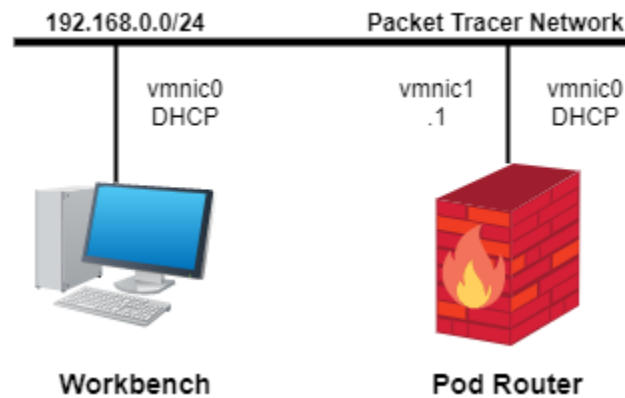

2 Planning

This guide provides specific information pertinent to delivering the *Cisco Packet Tracer - v8* pod. The [NETLAB+ Remote PC Guide Series](#) provides the prerequisite guidance for setting up your VMware infrastructure, including:

- An introduction to virtualization using *NETLAB+*
- Detailed setup instructions for standing up *VMware vCenter* and *VMware ESXi*
- Virtual machine and virtual pod management concepts using *NETLAB+*

This document assumes that you have set up virtual machine infrastructure in accordance with the [NETLAB+ Remote PC Guide Series](#). The planning information below refers to specific sections in the *Remote PC Guide* when applicable.

2.1 Pod Creation Workflow

The following list is an overview of the pod setup process.

1. Obtain the master virtual machine images required for the master pod.
2. Deploy the master virtual machine images to your *VMware vCenter Appliance*.
 - a. Deploy virtual machines using **Thin Provisioning** to reduce storage consumption.
 - b. Make necessary adjustments to each virtual machine in the environment.
 - i. Insert/Verify manual **MAC** addresses.
 - ii. Change the default network to **SAFETY NET**.
 - iii. Any other configuration changes mentioned in this guide.
3. Import the deployed virtual machines to the *NETLAB+ Virtual Machine Inventory*.
4. Activate or license the required software on each virtual machine when prompted.
5. Take a snapshot of each virtual machine in the master pod labeled **GOLDEN_MASTER** after all configurations and licensing have taken effect. The *GOLDEN_MASTER* snapshot is used to clone virtual machine images for the user pods.
6. Use the *NETLAB+ Pod Cloning* feature to create student pods from the master pod.
7. If multiple hosts are used in the *NETLAB+* environment, make a **Full Clone** of the master pod on the initial host (Host A) to the subsequent host (Host B) and so on using the *NETLAB+ Pod Cloning* feature.

2.2 Pod Resource Requirements

The *Cisco Packet Tracer - v8* pod will consume 7.28 GB of storage per each master pod instance.

The following table provides details of the storage requirements for each of the virtual machines in the pod.

Virtual Machine	OVF/OVA	Initial Master Pod (Thin Provisioned)	Maximum Allocated Memory
Workbench	2.9 GB	7.1 GB	4 GB
Pod Router	62 MB	180 MB	128 MB
Total	3.03 GB	7.28 GB	4.13 GB

2.3 ESXi Host Server Requirements

Please refer to the *NDG* website for specific *ESXi* host requirements to support virtual machine delivery: <https://www.netdevgroup.com/products/requirements/>

The deployment of the *Cisco Packet Tracer - v8* pod requires VMware ESXi version of **6.0** or greater.

Please Note

The number of **active** pods that can be used simultaneously depends on the *NETLAB+* product license and the number of *VMware ESXi* host servers meeting the hardware requirements specifications.

2.4 NETLAB+ Requirements

Installation of *Cisco Packet Tracer - v8* pod, as described in this guide, requires that you are running *NETLAB+ VE*.

Previous versions of *NETLAB+* do not support requirements for the *Cisco Packet Tracer - v8* pod on the physical host servers.

Please refer to the [NETLAB+ Remote PC Guide Series](#).

2.5 NETLAB+ Virtual Machine Infrastructure Setup

The *NETLAB+ Virtual Machine Infrastructure* setup is described in the following sections of the [NETLAB+ Remote PC Guide Series](#):

- *Registering a Virtual Datacenter in NETLAB+*
- *Adding ESXi hosts in NETLAB+*
- *Proactive Resource Awareness*



It is important to configure *Proactive Resource Awareness* to maximize the number of active pods per physical *ESXi* host.

2.6 Software Requirements

For the purpose of software licensing, each virtual machine is treated as an individual machine, PC, or server. Please refer to the specific vendor license agreements (and educational discount programs, if applicable) to determine licensing requirements for your virtual machines' software, operating system, and applications.

The minimum virtual infrastructure software required for standing up this pod is in the following table.

Virtual Infrastructure Requirements	
Software	Version
vSphere ESXi	6.0
vCenter Server	6.0

Please refer to the *Software and Licenses* section regarding the software requirements for virtual machines in the pod.

2.7 Networking Requirements

To accommodate the movement of large *VMs*, *OVF/OVAs*, and *ISO* disk images from one host to another, gigabit Ethernet or better connectivity is recommended to interconnect your *NETLAB+*, *vCenter Server* system, and *ESXi* host systems.

The two standard networking models recommended to interconnect your servers are described in detail in the *Networking Models* section of the [Remote PC Guide Series, Volume 1 - Introduction and Planning](#).

2.7.1 Pod Internet Access

The *Cisco Packet Tracer - v8* pod requires internet access. This access is required to access the Cisco Network Academy curriculum as well as completing the lab objectives in the student pods.

This environment is designed to leverage one vSwitch per host that attaches to a network that has a DHCP server to assign IPv4 addresses that are routable to the internet.

This lab environment is also designed to leverage the public DNS servers 8.8.8.8 and 4.2.2.2. This vSwitch must be able to access those servers, which may require adjustments in a firewall if applicable.

2.7.2 Completing the NETLAB+ Pod Internet Access and Use Agreement



You are required to complete the *NETLAB+ Pod Internet Access and Use Agreement* prior to obtaining access to the pod or content for this course.

Due to the security and legal implications regarding accessing the internet from within the pod, we require that you agree to the terms contained within this online document prior to obtaining access to the pod or content for this course:

<https://www.netdevgroup.com/content/cnap/ptagreement>

3 Software and Licenses

3.1 Downloading OVF Files

The virtual machines are made available as *Open Virtualization Format (OVF)* or *Open Virtualization Archive (OVA)* files. These files are available for download from *CSSIA*.

To request access to the preconfigured virtual machine templates from *CSSIA*:

1. Go to the *CSSIA Resources* page: <https://www.cssia.org/cssiaresources/>
2. Select **CSSIA VM Image Sharing Agreement**.
3. Complete and submit your access request by following the instructions on the request form.
4. *CSSIA* will provide, via email, password-protected download links. Access to the download links is provided only to customers who are current with their NETLAB+ support contract and are participants in the appropriate partner programs (*i.e.*, *Cisco Networking Academy*, *VMware IT Academy*, *Red Hat Academy*, and/or *Palo Alto Networks*).
5. Once all virtual machines have been downloaded, they can be deployed following the steps in the appropriate pod installation guide. Each virtual machine is deployed individually.

4 Master Pod Configuration

4.1 Deploying Virtual Machine OVF/OVA Files

Deploy on your host server the pod virtual machine *OVF/OVA* files you have downloaded.

1. Navigate to your **vSphere Client** using your management workstation, ensure that your downloaded *OVA/OVF* files are accessible on this machine, and then connect to your **vCenter Server**.
2. From the *vSphere Client* interface, navigate to **Hosts and Clusters**.
3. Right-click on the target **ESXi Host Server** and select **Deploy OVF Template**.
4. In the *Deploy OVF Template* window, on the *Select source* step, select the **Local File** radio button and click **Browse**.
5. Locate and select one of the VMs for the pod, click **Open**.

Virtual Machine	VM OS	Virtual Machine File Name
PodRouter	Linux	Cisco_Packet_Tracer_8_FM.PodRouter.ova
Workbench	Linux	Cisco_Packet_Tracer_8_FM.Workbench.ova

Please Note

Only one VM can be selected using this wizard. The process will have to be repeated for the remaining VMs.

6. Verify that the VM information populates next to the *Browse* button and click **Next**.
7. On the *Review details* step, make sure to click the checkbox for **Accept extra configuration options (if present)** and click **Next**.
8. On the *Select name and folder* step, change the name of the virtual machine to something that is easy to manage. You can use the names provided in the list below as names for the virtual machines if you do not have a set naming convention. Select the appropriate **datacenter** and click **Next**.

Virtual Machine	VM OS	Virtual Machine Deployment Name
PodRouter	Linux	Cisco_Packet_Tracer_8_Master.PodRouter
Workbench	Linux	Cisco_Packet_Tracer_8_Master.Workbench

9. On the *Select Storage* step, choose the appropriate storage device and make sure that **Thin Provision** is selected. Click **Next**.
10. In the *Setup networks* section, select **SAFETY NET** as the destination and click **Next**.



If **SAFETY NET** is not available, refer to the *Create a Safe Staging Network* section in the [Remote PC Guide Series – Volume 2](#).

11. In the *Ready to complete* section, make sure **Power on after deployment** is **unchecked** and confirm the settings. Click **Finish**.

12. *vCenter* will begin deploying the virtual machine. This may take some time, depending on the speed of your connection, HDDs, etc.

4.1.1 Modify Virtual Machines

Once the virtual machines are imported onto the host, verify the configurations. The following steps will guide you through the process.

1. In the *vSphere Client* interface, right-click on the imported virtual machine and select **Edit Settings**.
2. For all the virtual machines, manually assign the *MAC* addresses for each *NIC*. The table below identifies the *MAC* addresses per *NIC*.

Virtual Machine	NIC	Network	MAC
PodRouter	1	Network with DHCP Internet Access	Automatic
	2	SAFETY NET	00:50:56:99:2d:2f
Workbench	1	SAFETY NET	00:50:56:99:d0:99

- For the *Pod Router* virtual machine, change *Network adapter 1* to the network that has DHCP Internet access available as well as making sure that the *MAC* is set to **Automatic**, see [Pod Internet Access](#) and change *Network adapter 2* to the **SAFETY NET** network as well as making sure the *MAC* address is set to **Manual** and changed to **00:50:56:99:2d:2f**.

Edit Settings
Cisco_Packet_Tracer_8.PodRouter
✕

Virtual Hardware
VM Options

ADD NEW DEVICE

> CPU	1	
> Memory	128	MB
> Hard disk 1	1.19921875	GB
> SCSI controller 0	LSI Logic Parallel	
> Network adapter 1 *	POD_INTERNET	
Status	<input checked="" type="checkbox"/> Connect At Power On	
Adapter Type	VMXNET 3	
DirectPath I/O	<input checked="" type="checkbox"/> Enable	
MAC Address	00:50:56:99:6f:c5	Automatic
> Network adapter 2	SAFETY NET	
Status	<input checked="" type="checkbox"/> Connect At Power On	
Adapter Type	VMXNET 3	
DirectPath I/O	<input checked="" type="checkbox"/> Enable	
MAC Address	00:50:56:99:2d:2f	Manual
> Video card	Specify custom settings	
VMCI device	Device on the virtual machine PCI bus that provides support for the virtual machine communication interface	
> Other	Additional Hardware	

CANCEL
OK

4. For the *Workbench* virtual machine, change *Network adapter 1* to the **SAFETY NET** network as well as making sure the MAC address is set to **Manual** and changed to **00:50:56:99:d0:99**.

Edit Settings | Cisco_Packet_Tracer_8.Workbench ×

Virtual Hardware VM Options

[ADD NEW DEVICE](#)

> CPU	1	
> Memory	2	GB
> Hard disk 1	20	GB
> SCSI controller 0	LSI Logic Parallel	
> Network adapter 1	SAFETY NET	
Status	<input checked="" type="checkbox"/> Connect At Power On	
Adapter Type	VMXNET 3	
DirectPath I/O	<input checked="" type="checkbox"/> Enable	
MAC Address	00:50:56:99:d0:99	Manual
> CD/DVD drive 1	Client Device	<input type="checkbox"/> Connect...
> Video card	Specify custom settings	
VMCI device	Device on the virtual machine PCI bus that provides support for the virtual machine communication interface	
SATA controller 0	AHCI	
> Other	Additional Hardware	

[CANCEL](#) [OK](#)

4.2 NETLAB+ Virtual Machine Inventory Setup

This section will guide you in adding your templates to the *Virtual Machine Inventory* of your *NETLAB+ VE* system.

1. Log in to your *NETLAB+ VE* system using the administrator account.
2. Select the **Virtual Machine Infrastructure** icon.



3. Click the **Virtual Machine Inventory** icon.



Virtual Machine Inventory


Import, clone, and manage the inventory of virtual machines to be used with NETLAB+.

4. Click the **Import Virtual Machines** button located at the bottom of the list.

 Import Virtual Machines

The button is blue with rounded corners, featuring a white download icon (a square with a downward arrow) on the left and the text 'Import Virtual Machines' in white.

5. Select the appropriate datacenter from the list where your master VMs reside.
6. Select the checkbox next to the virtual machines you had just deployed and click **Import Selected Virtual Machines**.

 Import Selected Virtual Machines

The button is blue with rounded corners, featuring a white download icon (a square with a downward arrow) on the left and the text 'Import Selected Virtual Machines' in white.

7. When the *Configure VMs* window loads, you can set your virtual machine parameters.
 - a. Check the dropdown box for the correct operating system for each imported virtual machine.
 - b. Change *Role* to **Master** for each VM.
 - c. Add any comments for each virtual machine in the last column.



It is advised to leave the *Version* and *Build* numbers for reference when requesting *NDG* support.

- d. Verify your settings and click **Import (X) Virtual Machines** (notice the number in parenthesis is dynamic, depending on the amount of VMs selected).

- e. Verify all *Import Statuses* report back with **OK** and then click on the **Dismiss** button.
- f. Verify that your virtual machines show up in the inventory.

For additional information, please refer to the [NETLAB+ VE Administrator Guide](#).

4.3 Building the Master Pod

This section will assist you in adding the *Cisco Packet Tracer - v8* pod to your *NETLAB+* system.

4.3.1 Enabling Lab Content in Course Manager

Please refer to the *Course Manager* section of the [NETLAB+ VE Administrator Guide](#) on how to enable content. Please install the **Cisco Packet Tracer - v8** course.

4.3.2 Create the Master Pod


1. Log into **NETLAB+ VE** with the *administrator* account.
2. Select the **Pods** icon.



3. Create a new pod by scrolling to the bottom and clicking the **Create New Pod** button.




- Then, click on the **Cisco Packet Tracer - v8** pod design from the list of installed pod types.

 <p>Cisco Packet Tracer VM</p>	<p>Cisco Packet Tracer 8 Cisco Packet Tracer 8 2020 Copyright (C) Network Development Group, Inc. https://www.netdevgroup.com/support/tech_support.html</p>
---	---

- On the *New Pod* window, input a value into the **Pod ID** and **Pod Name** fields. Click **Next**.

New Pod

Pod Type



Pod ID

Pod Name

Used Pod IDs

- 1
- 101
- 201
- 202
- 301
- 302
- 303



The **Pod ID** determines the order in which the pods will appear in the scheduler. It is best practice to use a block of sequential ID numbers for the *Pod Id* that allows for the number of pods you are going to install.

The **Pod Name** identifies the pod and is unique per pod. Here we used the name of the lab set or course in a shortened form along with a host identifier (H120), the type and number of the pod (M1000).


- To finalize the wizard, click **OK**.

For additional information, please refer to the [NETLAB+ VE Administrator Guide](#).


4.3.3 Attach Virtual Machines to the Master Pod

Update the master pod to associate the virtual machines with the newly created pod.

1. Select the **Cisco Packet Tracer - v8** master pod from the pod list.

1000	 Cisco Packet Tracer VM	Cisco_Packet_Tracer_8_H120_M1000
------	---	----------------------------------

2. Click on the **Action** dropdown next to the virtual machine you are about to assign and select **Attach VM**.

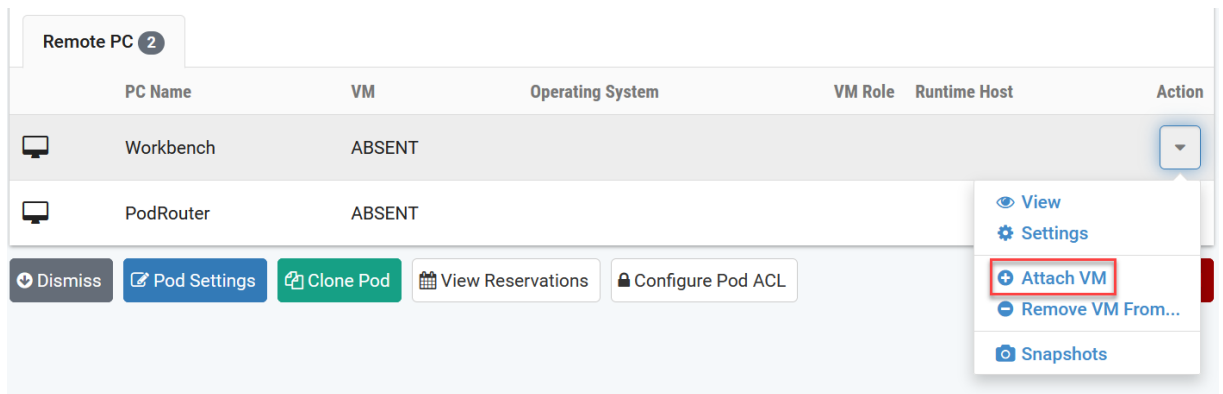


Remote PC 2

PC Name	VM	Operating System	VM Role	Runtime Host	Action
Workbench	ABSENT				▼
PodRouter	ABSENT				

Dismiss Pod Settings Clone Pod View Reservations Configure Pod ACL

- View
- Settings
- Attach VM**
- Remove VM From...
- Snapshots

3. Select the corresponding virtual machine from the inventory list.

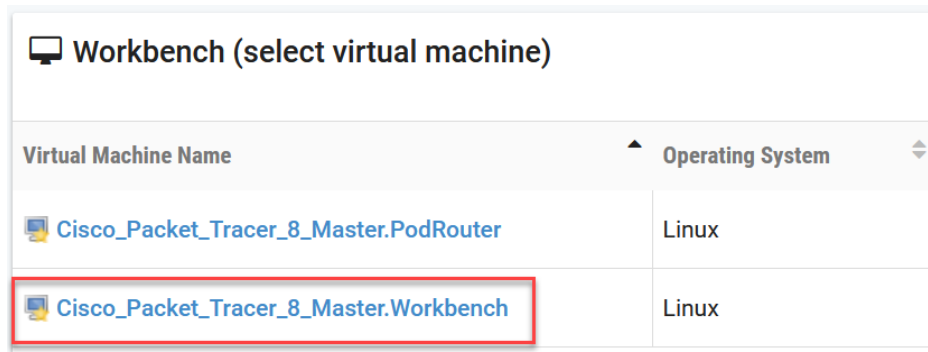

Workbench (select virtual machine)

Virtual Machine Name	Operating System
Cisco_Packet_Tracer_8_Master.PodRouter	Linux
Cisco_Packet_Tracer_8_Master.Workbench	Linux

4. Click **OK** to confirm the VM attachment and repeat the previous steps for the remaining virtual machines.


4.3.4 Create Snapshots for the Master Virtual Machines

In order to proceed with pod cloning, snapshots must be created on each of the pod's virtual machines.



Verify that all VMs are still powered off before taking snapshots.


1. Make sure to view the **Cisco Packet Tracer - v8** master pod you just assigned machines to. In the pod view, click on the dropdown menu option underneath the *Action* column for a specific VM and select **Snapshots**.

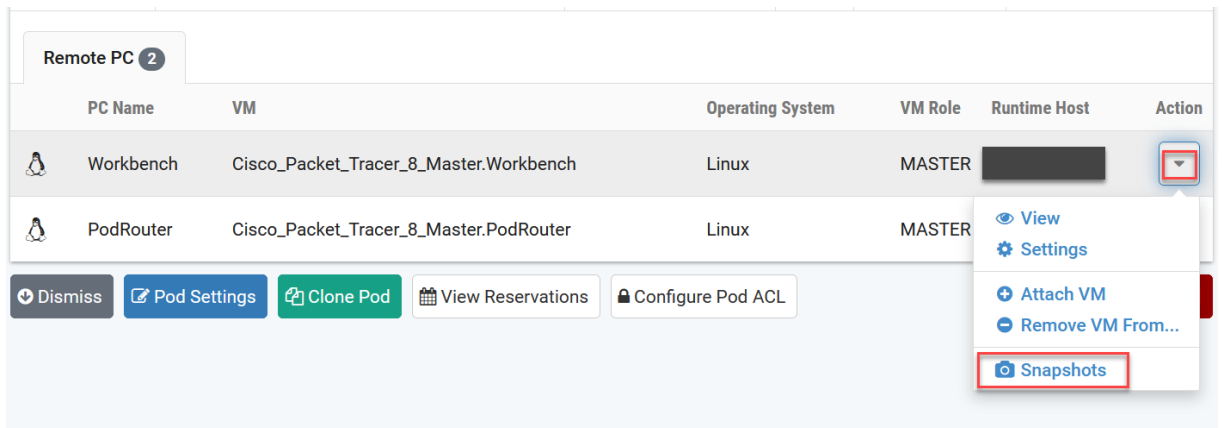

PC Name	VM	Operating System	VM Role	Runtime Host	Action
Workbench	Cisco_Packet_Tracer_8_Master.Workbench	Linux	MASTER		<ul style="list-style-type: none"> View Settings Attach VM Remove VM From... Snapshots
PodRouter	Cisco_Packet_Tracer_8_Master.PodRouter	Linux	MASTER		

Buttons below the table: Dismiss, Pod Settings, Clone Pod, View Reservations, Configure Pod ACL.

2. In the *Snapshot Manager* window, click on the **Take** button. This will take a snapshot of the current state of the virtual machine.

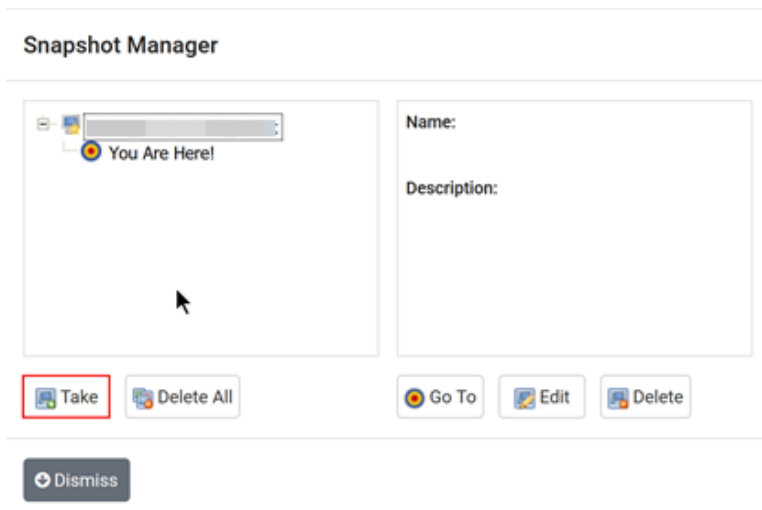

Snapshot Manager

Name: _____

Description: _____

Buttons: Take, Delete All, Go To, Edit, Delete

Dismiss



Any changes made after this will require a new snapshot or those changes will not reflect in the reset state of the pod or its clones.

- In the *Take Snapshot* window, type **GOLDEN_MASTER** into the *Name* text field, or you may choose another naming convention as long as it is consistent for easy management. Click **OK**.

Take Snapshot

Name:


Description:



It is recommended to use *GOLDEN_MASTER* as the snapshot name when working with normalized pod types.

- In the *Snapshot Manager* window, notice the snapshot is created. Click the **Dismiss** button.

Snapshot Manager

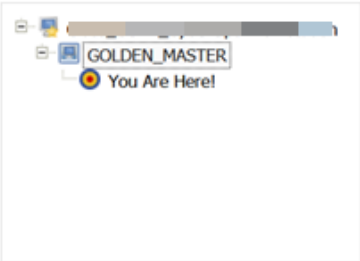

Name:
GOLDEN_MASTER

Description:




At this point, it is good to verify that you have only one snapshot on the virtual machine. Multiple snapshots increase the likelihood of having problems, especially if the snapshots are named the same. Also, the more snapshots a virtual machine has, the slower the performance and the more drive space is used.

- Repeat the previous steps for the remaining virtual machines.

4.3.5 Set the Revert to Snapshot

1. Make sure to view the **Cisco Packet Tracer - v8** master pod you just created snapshots for. In the pod view, click on the dropdown menu option underneath the *Action* column and select **Settings**.

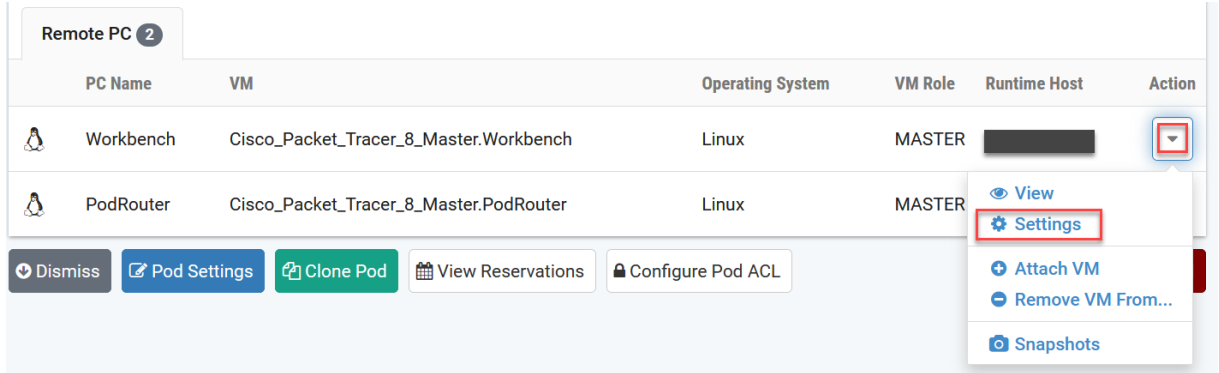


PC Name	VM	Operating System	VM Role	Runtime Host	Action
Workbench	Cisco_Packet_Tracer_8_Master.Workbench	Linux	MASTER		⌵
PodRouter	Cisco_Packet_Tracer_8_Master.PodRouter	Linux	MASTER		<ul style="list-style-type: none"> View Settings Attach VM Remove VM From... Snapshots

2. In the virtual machine's *Settings* window, click on the *Revert to Snapshot* dropdown and select **GOLDEN_MASTER** and then click the **Submit** button.



This sets the snapshot on the virtual machine that will get reverted to each time the pod is scheduled.

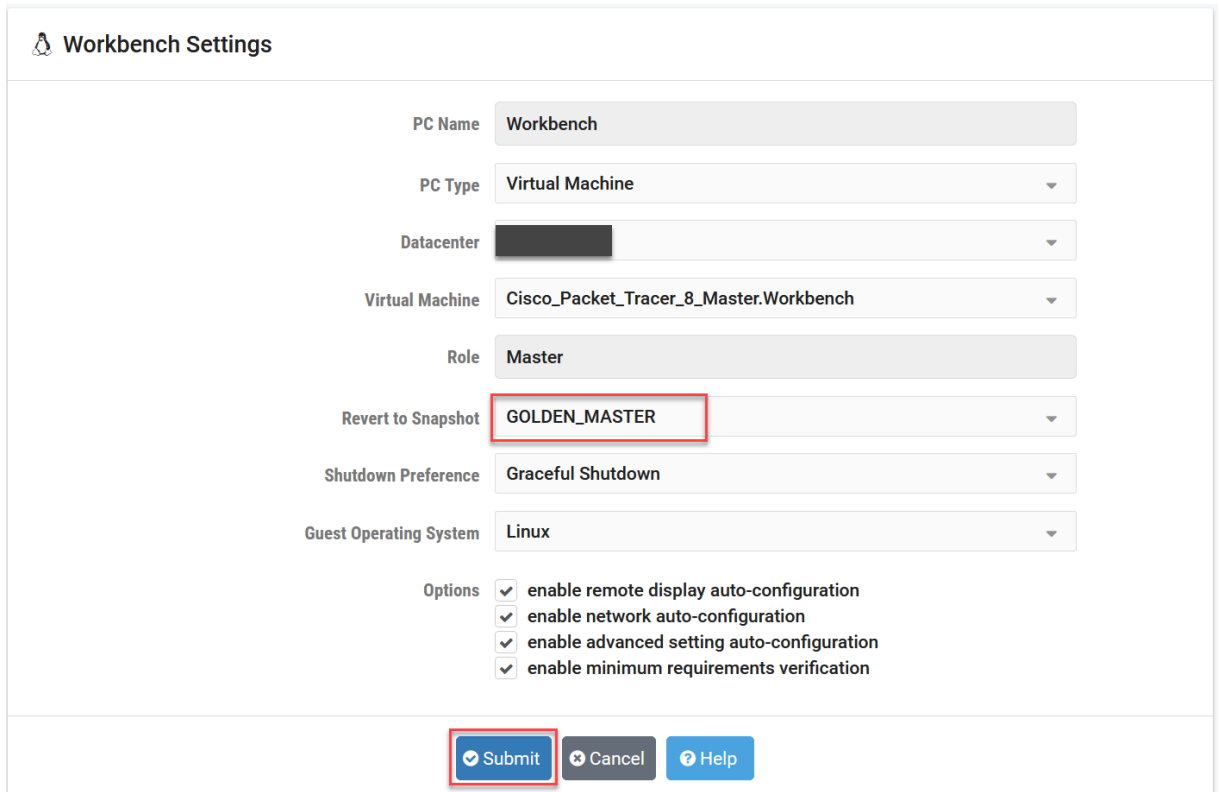

Workbench Settings

PC Name: Workbench

PC Type: Virtual Machine

Datacenter: [Redacted]

Virtual Machine: Cisco_Packet_Tracer_8_Master.Workbench

Role: Master

Revert to Snapshot: GOLDEN_MASTER

Shutdown Preference: Graceful Shutdown

Guest Operating System: Linux

Options:

- enable remote display auto-configuration
- enable network auto-configuration
- enable advanced setting auto-configuration
- enable minimum requirements verification


Submit Cancel Help

3. Click **OK** to confirm.

- Return to the pod view page and repeat the previous steps for the remaining virtual machines.

4.3.6 Bring the Master Pod Online

- In the pod view, click the drop-arrow under *State* and select **Bring Pod Online**.



4.4 Testing the Master Pod

The *Cisco Packet Tracer - v8* master pod should be tested prior to cloning to ensure that the pod spins up correctly, the networking options function as planned, and the pod reverts back to its snapshot after the reservation is ended. This process consists of:

- Scheduling the master pod
- Testing out the master pod
- Ending the reservation

4.4.1 Virtual Machine Credentials

For your reference, the following table provides a list of the credentials for the systems in the pod:

Machine	User name	Password
Workbench	sysadmin	Train1ng\$

4.4.2 Create Class and Schedule the Master Pod

Create a class as identified in the *Add Classes* section of the [NETLAB+ VE Instructor Guide](#), followed by adding the appropriate content to the selected class, and then schedule the *Master Pod*.



When scheduling the *Master Pod*, it is important to schedule the pod for enough time to complete the following steps. Failure to complete the steps prior to taking the final snapshot could mean redeploying necessary virtual machines.

4.4.3 Test the Master Pod

1. Log in to NETLAB+ using an instructor or student account that has been assigned to the class that was created in the previous step.
2. Launch the **Workbench** virtual machine.
3. After the **Workbench** virtual machine starts up, it should automatically startup Packet Tracer, which requires logging into the Cisco Networking Academy.
 - a. If the Cisco Networking Academy login page does not come up, the most likely cause is that **Network Adapter #1** on the **PodRouter** VM is not connected to a vSwitch Port Group where there is DHCP server and/or Internet access.
4. Log in to the Cisco Networking Academy.
5. Minimize the Cisco Packet Tracer window.
6. Open **Firefox** (which should bring up the Cisco Networking Academy page) and login to the Cisco Networking Academy
7. Load a course that has Packet Tracer labs (i.e., CCNA1/Introduction to Networks v7.0)
8. Go to the Modules section and open the course content into a new window.
9. Navigate to a module that has a Packet Tracer assignment
10. Open the Packet Tracer Assignment (using Packet Tracer).
11. Close the Cisco Networking Academy course
12. Logout of the Cisco Networking Academy site

4.4.4 End Reservation

You may now end the reservation of the master pod.

5 Pod Cloning

This section will help you create multiple student pods. The following sections describe the *NETLAB+* pod cloning feature used to create student pods on one or two host systems.

5.1 Linked Clones and Full Clones

NETLAB+ can create *linked clones* or *full clones*.

A **linked clone** (or linked virtual machine) is a virtual machine that shares virtual disks with the parent (or master) virtual machine in an ongoing manner. This conserves disk space and allows multiple virtual machines to use the same software installation. Linked clones can be created very quickly because most of the disk is shared with the parent VM.

A **full clone** is an independent copy of a virtual machine that shares nothing with the parent virtual machine after the cloning operation. The ongoing operation of a full clone is entirely separate from the parent virtual machine.


5.2 Creating User Pods

The following section describes how to create user pods on the same *VMware Host* system that holds your master pod's virtual machines. In this scenario, we will create linked virtual machines using the *NETLAB+* pod cloning utility.

1. Log in to **NETLAB+ VE** with the *administrator* account.
2. Select the **Pods** icon.



3. Click on your master pod.
4. Make sure the pod is offline by selecting **Take Pod Offline**.
5. Click the **Clone Pod** button to create a new pod, based on the settings and snapshots of this pod.



6. Input a new ID value into the **New Pod ID** field. It is advised to keep the pods in numerical order. If the pod IDs are not in numerical order, they will not show up in the scheduler in numerical order. Click **Next**.

- Enter a name for the cloned pod into the **New Pod Name** field. For example, **Cisco_Packet_Tracer_8_H120_S1001**. Click **Next**.



The **Pod Name** identifies the pod and is unique per pod. Here we used the name of the lab set or course in a shortened form along with a host identifier (H120), the type and number of the pod (S1001).


- When the action has finished processing, you are presented with a settings screen. Notice each VM has its own tab. Go through each tab and verify the following:

Source Virtual Machine:

- From Snapshot* should be set to the **GOLDEN_MASTER** snapshot you created previously.


Target Virtual Machine:

- For *Type*, verify that **Linked** is selected.
- For *Role*, verify that the **Normal** role is selected.
- For *Take Snapshot*, verify that **GOLDEN_MASTER** is inputted.
- For *Copy BIOS UUID*, only choose this option if you wish to preserve the VM's BIOS UUID for the targeted clone VM (when this option is checked, it will help with keeping licensing intact such as Microsoft Windows Licensing/Activation).

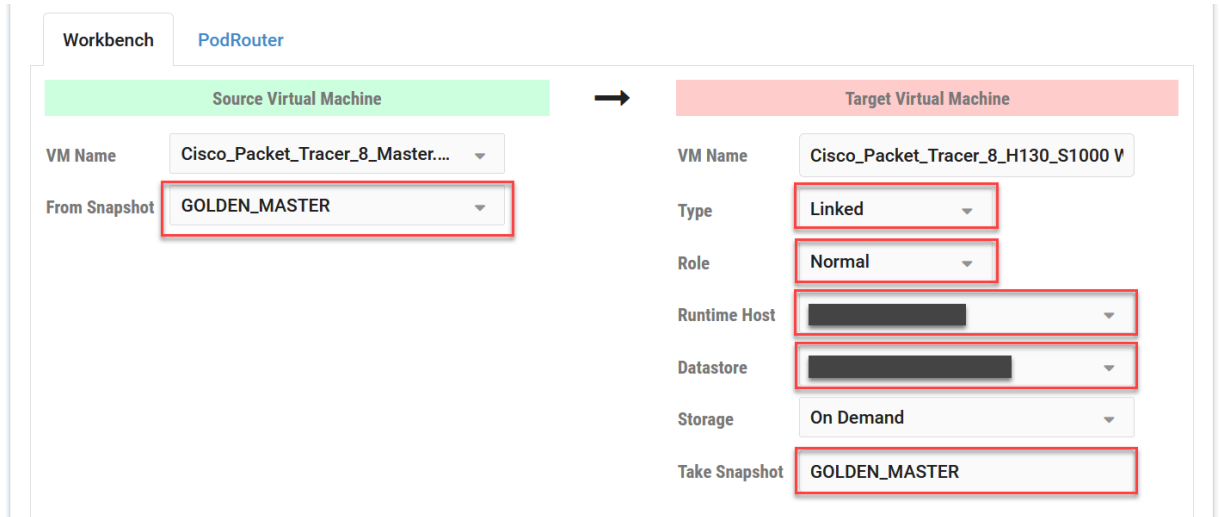


The screenshot shows the 'PodRouter' configuration interface. It is divided into two main sections: 'Source Virtual Machine' (highlighted in green) and 'Target Virtual Machine' (highlighted in red). An arrow points from the source to the target. The 'Source Virtual Machine' section has 'VM Name' set to 'Cisco_Packet_Tracer_8_Master...' and 'From Snapshot' set to 'GOLDEN_MASTER'. The 'Target Virtual Machine' section has 'VM Name' set to 'Cisco_Packet_Tracer_8_H130_S1000 V', 'Type' set to 'Linked', 'Role' set to 'Normal', 'Runtime Host' set to a default value, 'Datastore' set to a default value, 'Storage' set to 'On Demand', and 'Take Snapshot' set to 'GOLDEN_MASTER'. Red boxes highlight the 'From Snapshot', 'Type', 'Role', 'Take Snapshot', and 'Datastore' fields in the target section.

- When you are done changing settings, click **Clone Pod**. This should complete within a minute as we are creating linked virtual machines.



- When the pod clone process is finished, click **OK**.
- If you want to dedicate this pod to a particular class, team, or student, use the *Pod ACLs* feature. For details, see the [NETLAB+ VE Instructor Guide](#).

- Click the **Bring Pod Online** button on the *Pod Management* page to make the pod available.

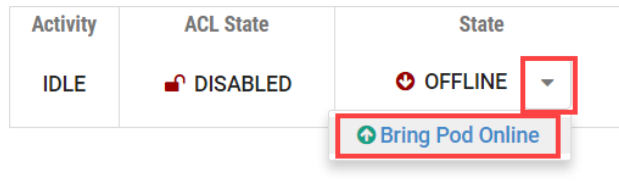

The user pod can now be reserved. When the reservation becomes active, *NETLAB+* will automatically configure virtual machines and virtual networking for your new pod.



The *GOLDEN_MASTER* snapshot is the starting point for all pods. We recommend that you reserve the 1st pod and conduct some labs to make sure the snapshot images work correctly. If there are defects, make corrections to the images to the master pod and retake the *GOLDEN_MASTER* snapshot before creating additional pods.


5.3 Copying Your Master Pod to the Second Host

For this task, we will use the pod cloning utility to copy our master pod to the second host.

- Log in to *NETLAB+* with the administrator account.
- Select the **Pods** icon.



- Click on the master pod.
- Make sure the pod is offline by selecting **Take Pod Offline**.
- Click the **Clone** button to create a new pod, based on the settings of this pod.



- Input a new ID value into the **New Pod ID** field. It is advised to keep the pods in numerical order. If the pod IDs are not in numerical order, they will not show up in the scheduler in numerical order. Click **Next**.

7. Enter a name for the cloned pod into the **New Pod Name** field. For example, **Cisco_Packet_Tracer_8_H130_M1000**. Click **Next**.



The **Pod Name** identifies the pod and is unique per pod. Here we used the name of the lab set or course in a shortened form along with a host identifier (H130), the type and number of the pod (M1000).

8. When the action has finished processing, you are presented with a settings screen. Notice each VM has its own tab. Go through each tab and verify the following:


Source Virtual Machine:

- a. *From Snapshot* should be set to the **GOLDEN_MASTER** snapshot you created previously.

Target Virtual Machine:

- a. For *Type*, verify that **Full** is selected.
- b. For *Role*, verify that the **Master** role is selected.
- c. For *Take Snapshot*, verify that **GOLDEN_MASTER** is inputted.
- d. For *Runtime Host*, select the second host system (which should be different than the system you are cloning from).
- e. For *Copy BIOS UUID*, only choose this option if you wish to preserve the VM's BIOS UUID for the targeted clone VM (when this option is checked, it will help with keeping licensing intact such as Microsoft Windows Licensing/Activation).

9. When you are done changing settings, click **Clone Pod**. This may take up to 30 minutes as full copies are being made. You may navigate away from the cloning progress screen, and then later return to the pod to check progress.



10. When the pod clone process is finished, click **OK**.
11. Please test the master pod prior to cloning student pods.

5.4 Creating User Pods on the Second Host

To create user pods on the second host, repeat the steps to create user pods on the first host (see [Creating User Pods](#)), substituting the second master pod (created in the previous section) as the cloning source.

5.5 Assigning Pods to Students, Teams, or Classes

Please refer to the [NETLAB+ VE Instructor Guide](#) for details on using the *Pod ACLs* feature.